




Continuous Insert Moulding

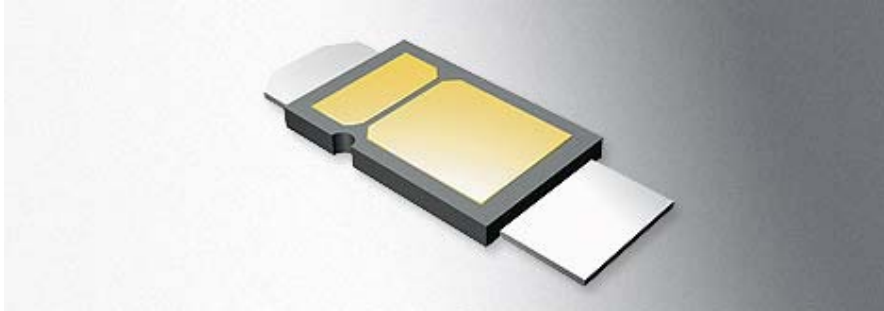


Example of product: Battery Contact

Notable features of the battery contact are its minimal weight and the extreme resistance to corrosion of its contact surfaces.

The strip measuring 0.13 mm in thickness is continuously fed for insert moulding; it is then delivered on reels for best possible integration into the customer's production process.

Consequent quality controls as well as monitoring by camera are a guarantee for ppm-values of under 30.

Technical Data

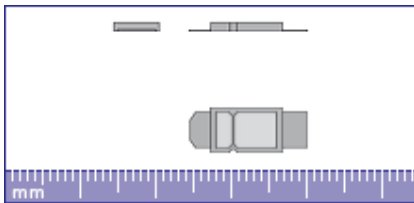

Plastic	PBT Pocan B 3235
Strip	Ni 300 nickel gold-plated
Injection moulding tool	8 cavities
Type of gating	Stripper plate mould

A. MAIER Präzision GmbH
Gewerbehallestraße 1 - 3
78112 St. Georgen / Schwarzwald
Germany

Phone: +49 (0) 77 24 / 88 03-0
Fax: +49 (0) 77 24 / 88 03-40
E-Mail: info@a-maier.de
Net: www.a-maier.de